




## TECHNICAL DATA

GENERAL		TW17KX
Load capacity to 500 mm	kg	1700
Load capacity to 600 mm	kg	1555
Unladen weight	kg	2750*
Transmission	-	Hydrostatic
MAST		
Fork carriage	-	FEM 2
Carriage width	mm	1100
ENGINE		
Brand	-	KUBOTA
Model	-	V1505
Power	kW	18,5
Rpm	rpm	2300
Torque	N·m@rpm	92.5@1600
No. cylinders	-	4
Emissions	-	Stage V
Alternator	V - A	12 - 40
DRIVING		
Max. speed	km/h	18
Gradeability	%	35
Traction	-	4x4
Front tyres	-	10,0/75-15.3
Rear tyres	-	7.00-12
HYDRAULIC SYSTEM		
Hydraulic circuit	-	Single gear pump + priority valve
Flow rate	l/min	25
Working pressure	bar	140-160
TANKS CAPACITY		
Fuel	l	35
Hydraulic	l	35
BRAKES		
Service	-	Disc on front wheels
Parking	-	Automatic multi-disc on front wheels

**DIMENSIONS**

TYPE OF MAST	Maximum lift (mm)	Retracted mast height (mm)	Free lift (mm)	Load at maximum height (kg)
Duplex	2500	2080	-	1700
Duplex	3140	2400	-	1700
Duplex	3600	2630	-	1565
Duplex	3000	1820	1070	1700
Triplex	3800	1960	1330	1390
Triplex (Std.)	4000	2180	1330	1390

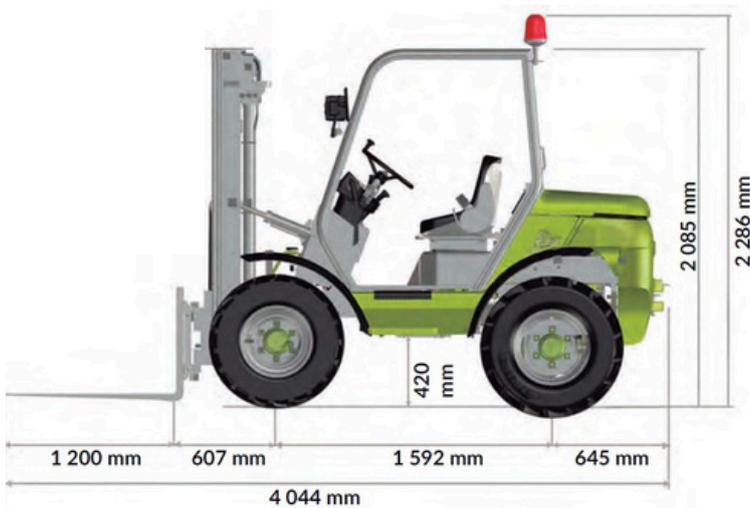

**DIMENSIONS**

**TW17KX**

External turning radius	mm	4000
Internal turning radius	mm	2052
Mast tilt forward	°	8
Mast tilt backward	°	8
Fork width	mm	100

**OTHER CAB OPTIONS**

Octagonal (customized for fruit growers)

Buggy (h<2m)



[www.agrimac.es](http://www.agrimac.es)



The data contained in this document is for information purposes only. They do not represent a commitment on the part of the manufacturer and are subject to change.